PREMIER EQUESTRIAN®
The Arena Company

Sand Data Sheet for Premier ProStride

The graph below shows the acceptable ranges the sand particles must fall within to mix properly with **ProStride footing**. Silica sand is preferred. Particle shape should be angular to sub-angular. Angular particles can wear hooves on non-shod horses.

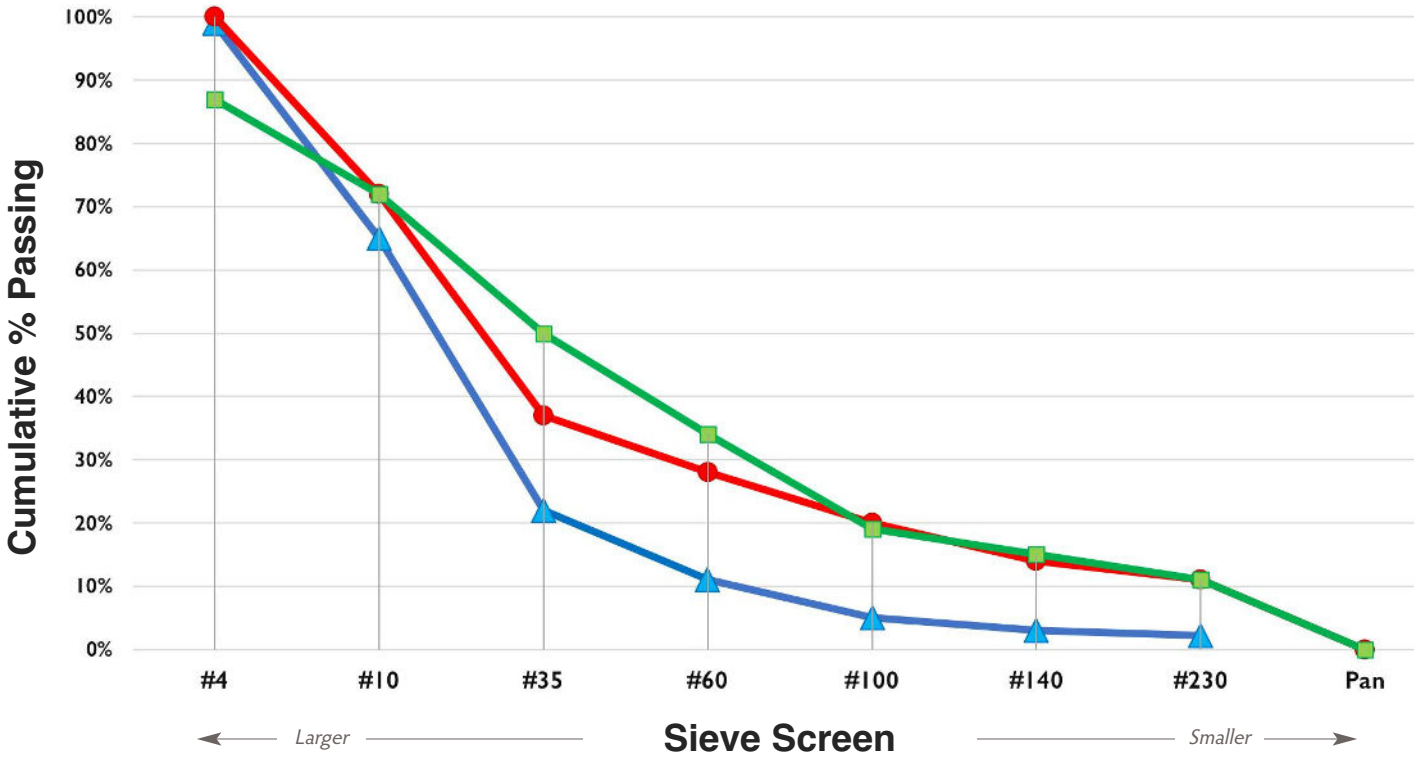

Typical Product Analysis

This chart indicates the Particle Percent Passing each sieve.
This is an example of percentages that sands may contain. Use this as a guide for your sand provider.

Please contact a Premier Specialist to verify that the sand you are using will perform.

% Passing

ASTM/USA Sieve Screen	Min. Range ▲	Med. Range ●	Max. Range ■
#4	99%	100%	87%
#10	65%	72%	72%
#35	22%	37%	50%
#60	11%	28%	34%
#100	5%	20%	19%
#140	3%	14%	15%
#230	3.3%	11%	11%
Pan	0%	0%	0%

Premier Equestrian
801-446-1857 • 800-611-6109 | 8915 S. 700 E. • Suite 102, Sandy UT 84070 | www.PremierEquestrian.com

Updated September 26, 2018