

# Premium Indoor/Outdoor Waterproof UL507 Certified Fans

The Indoor/Outdoor POW (Premium Outdoor Waterproof) fans from J&D Manufacturing are durable, three-speed, waterproof fans. These fans come pre-wired for 115 Volts with cord and 3-prong plug for "No Electrician\* Needed" installation. These fans are perfect in areas around the farm, greenhouse, and outdoor patio that may come in contact with rain, humidity, and water spray.


## Features

- Direct drive, high output performance and quiet operation
- 3-speed pull chain
- Attached cord with 3-prong plug pre-wired for 115 Volts
- UL507 certified for indoor and outdoor use
- Aluminum blades - painted
- Corrosion-resistant, powder coated fan guards meet OSHA 1910.212(a)(5) requirements for installation at any height
- Totally enclosed, maintenance-free, high-efficiency motors have completely sealed ball bearings, are UL and CUL recognized, and are covered by a **1 Year Warranty**
- Rated for use with our misting/fogging products to increase cooling abilities

**3  
Speed**

**No electrician needed!  
Hang it up  
Plug it in**

## Wall, Ceiling or Pole Mount Fans

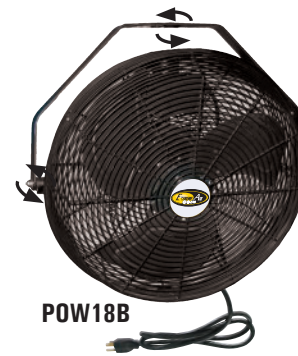

## Features

- 18" model available in white or black
- 8' cord
- Versatile powder coated mounting bracket allows for easy tilt and swivel of fan to quickly change direction and angle of air movement, a perfect work station fan

## Oscillating Wall Mount Fans

## Features

- Available in 24" and 30"
- Includes powder coated steel wall bracket
- 10' cord
- Range of oscillation — 93°
- Minimal assembly required



Part#	Size	Ph	Spd	Thrust CFM	CFM/ Watt	Drive	Prop
Wall, Ceiling or Pole Mount Fans							
Single Phase							
White							
POW14	14"	1	3(H) (M) (L)	1,090 1,000 870	13.6 15.2 15.5	Direct	3-Alm
POW18	18"	1	3(H) (M) (L)	2,210 1,870 1,420	13.9 13.4 12.7	Direct	3-Alm
Black							
POW18B	18"	1	3(H) (M) (L)	2,210 1,870 1,420	13.9 13.4 12.7	Direct	3-Alm
Optional Bracket							
POWTPB	Bracket, Post/Pole, w/U-bolt & Hdwr, White						
Oscillating Wall Mount Fans							
Single Phase							
White							
POW24OSC	24"	1	3(H) (M) (L)	3,470 2,930 2,550	13.1 16.3 16.4	Direct	3-Alm
POW30OSC	30"	1	3(H) (M) (L)	4,790 3,960 3,310	17.7 20.6 20.7	Direct	3-Alm

\* Experts choice

**Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 230-12**

+ GFCI (Ground Fault Circuit Interrupter) recommended on all circuits